

Link do produktu: <https://www.taniosat.pl/antena-adapter-wifi-usb-do-dekodera-tunera-ltc-ityp-zgemma-enigma2-vu-mt7601-p-12717.html>



ANTENA ADAPTER WiFi USB DO DEKODERA TUNERA LTC ITP ZGEMMA ENIGMA2 VU MT7601

Cena	16,66 zł
Numer katalogowy	2410200000811
Kod producenta	2410200000811
Kod EAN	6974674272329
EAN (GTIN)	6974674272329
Kod producenta	2410200000811
Waga produktu z opakowaniem jednostkowym	0.03
Producent	1JustLink
Interfejs	USB
Rodzaj karty	zewnątrzna
Pasmo	2,4 GHz
Antena	zewnątrzna odkręcana
Standard pracy bezprzewodowej	802.11ax (Wi-Fi 6)
Maksymalna prędkość transmisji	150

Opis produktu

Adapter / karta Wi-Fi USB z chipsetem **MT7601**. Karta współpracuje z komputerami, oraz z 99% smartboxami na naszym rynku. W porównaniu do adapterów bez antenki zasięg większy o około 20 - 30%

W systemach Enigma2 czy Spark nie trzeba dogrywać sterowników, wystarczy skonfigurować dostęp do sieci Wi-Fi.

Działa w tunerach :

- nbox - ENIGMA
- Vu+
- Dreambox
- AB Cryptobox
- Dreamsky
- HD Box
- Openbox
- Octagon
- Opticum





Parametry techniczne :

- 802.11b: 1, 2, 5.5, 11Mbps;
- 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps
- 802.11n: (20MHz) MCS0-7, Support up to 72 Mbps
- (40MHz) MCS07, Support up to 150Mbps
- OFDM, Peak rate 150Mbps, Peak throughput 90 Mbps.
- Security support for 64/128 WEP, WPA, WPA2, TKIP, AES
- Operates in 2.4Ghz frequency bands. Power Management
- Chipset: MT7601
- Standards: IEEE802.11b/g & 802.11n
- (1T1R mode, 150Mbps)
- Antenna: 2DBI
- Operation Frequency: 2412 - 2483.5 MHz
- Software Support:
- Windows CE/2000/XP/VISTA/7/8/10

-
- Linux 2.6.X
 - Mac OS X

Enjoy high-speed wifi

IEEE802.11n standard-the newest generation of Wi-Fi.


2.4G
Frequency

150M
High-speed



Freely rotating antenna

The front of the antenna can be rotated 360°,
and the side can be rotated by 90° to
adjust the signal strength at any time.

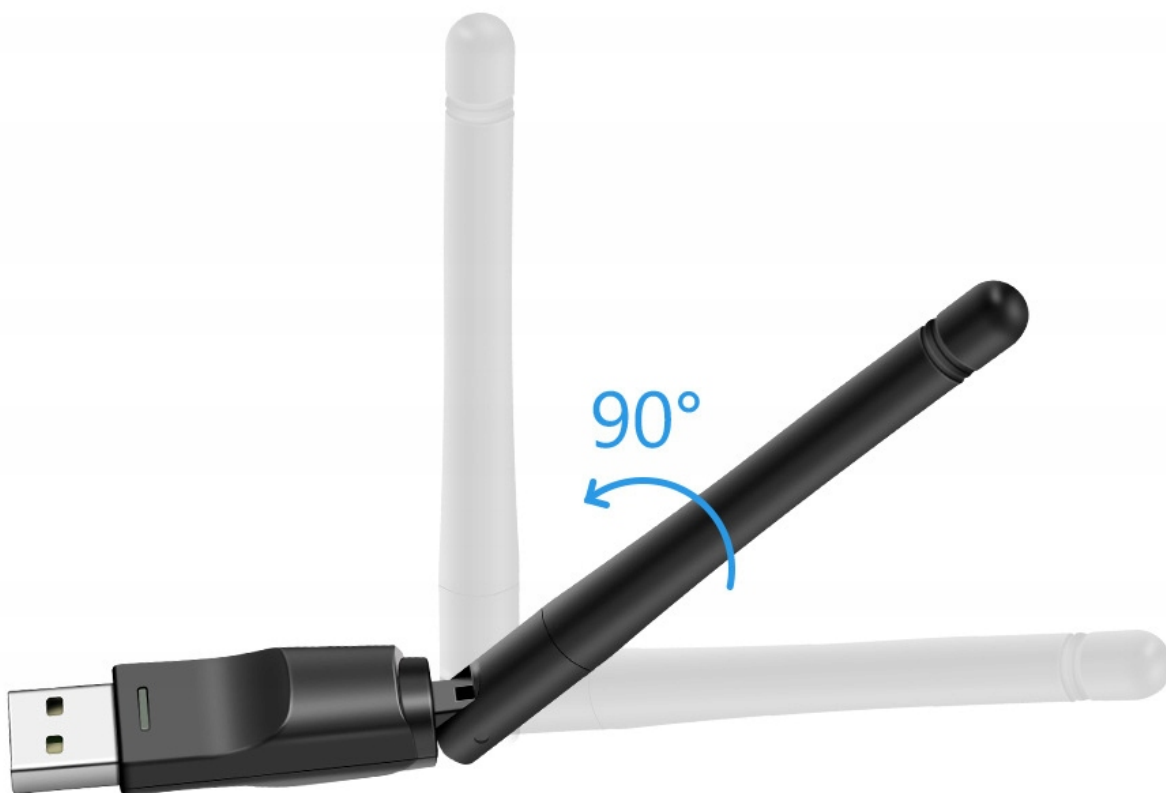











Enjoy high-speed wifi

IEEE802.11n standard-the newest generation of Wi-Fi.

2.4G

Frequency

150M

High-speed



Freely rotating antenna

The front of the antenna can be rotated 360°,
and the side can be rotated by 90° to
adjust the signal strength at any time.

